



Electrolux

Vacuum Packers Mobile Vacuum Packer - 20 m³/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Vacuum Packers

Mobile Vacuum Packer - 20 m³/h

600043 (EVP45F)

Mobile vacuum packer 20 m³/h

Short Form Specification

Item No.

Floor standing model on wheels. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 9 operating programs (including the external vacuum one). Mechanical "soft air" device allows the controlled re-admission of air into the chamber. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 450mm.

Main Features

- Digital control panel allows the selection of up to 9 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program: P1 to P8 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing) while P9, "external vacuum" is composed by only 2 selections (vacuum and extravacuum).
- Electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process, to ensure simplicity of use and maximum reliability.
- "Soft air" device allowing to control the re-admission of air into the chamber.
- Free-standing appliance mounted on 4 castors.
- Safety system protects the machine in case of sealing bars overheat.
- Model complies with international hygiene and cleanability standards.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Sealing bar 450 mm.
- Digital control panel allows programming and storing of up to 9 operating programs for a better vacuum pressure and heat seal times.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.
- Can be equipped with a coupler allowing the vacuuming of products with other more appropriate containers, not in the chamber itself.

Construction

- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglass lid.
- Pressure chamber with rounded corners.

Optional Accessories

- Kit adapter for external vacuum packing. Only for 6, 10 and 20 m³/h vacuum packers PNC 650008
- Inclined filling table to vacuum pack liquids for 20 m³/h vacuum packers PNC 650010


APPROVAL: _____



Electrolux

Vacuum Packers Mobile Vacuum Packer - 20 m³/h

Front

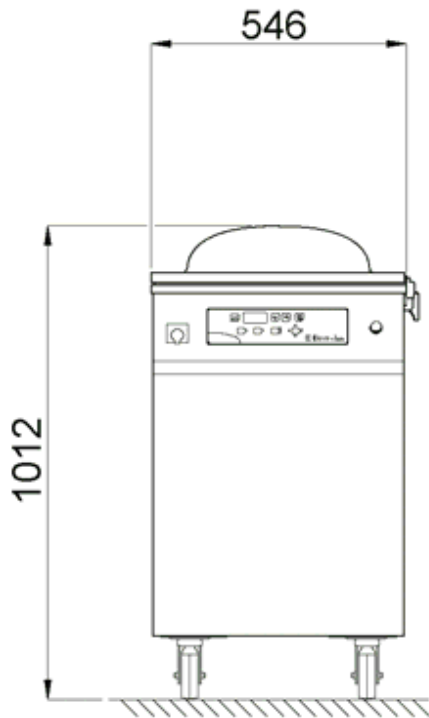

Electric

Supply voltage:

600043 (EVP45F)

220 V/1N ph/50/60 Hz


Total Watts:

1.1 kW

Key Information:

Pump:	20 m ³ /h
External dimensions, Height:	1013 mm
External dimensions, Width:	550 mm
External dimensions, Depth:	680 mm
Chamber width:	456 mm
Chamber depth:	466 mm
Chamber height:	218 mm
Sealing bar length:	450 mm
Net weight (kg):	101

Side

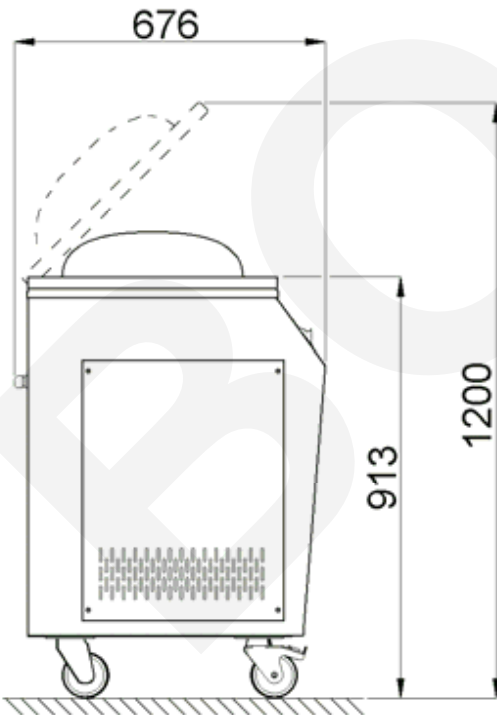

EI = Electrical connection



Vacuum Packers
Mobile Vacuum Packer - 20 m³/h

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.11.06