

PRODUCT:

QUANTITY:

ITEM #:

Designed Smart

Developed for high output in tight spaces!

- The AT Express™ generates over 300 slices of toast per hour.
- Designed to fit into tight space areas on counters.
- Toasters have extended super feeder and warming area to allow for high volume production.
- Unique warming area keeps toast at the perfect temperature until you are ready to serve.

Maximum Versatility!

- A variable speed control for the conveyor produces optimum results in toasting color and texture.
- Ability to turn off either the top or bottom element for one-sided toasting.
- Able to handle a variety of breads, bagels or muffins.

Safest Toaster in the Industry!

- Protects your employees with “Cool Touch” exteriors...both sides and top surfaces.

Easy to Maintain and Service!

- Conveyors and crumb trays are easily accessible and simple to clean.
- Removable Side panel allows easy access for service.

Cool Touch Feature

- “Cool Touch” feature protects employees from burns by keeping exteriors at “Xtreme Cool” temperatures
- At-Express air circulation system keeps cooling air circulating in toaster, even after the power switch is turned off protecting components and exteriors from excessive residual heat.

Built Solid

Built to Last

- Stainless Steel construction protects against kitchen wear and tear and rust.
- Metal sheathed heating elements offer enhanced durability and consumer safety vs. quartz tube heating elements.
- High temperature insulated wire is used for long life.
- High temperature bearing never require lubrication.



AT EXPRESS RADIANT CONVEYOR TOASTER

APW Wyott Design Features

- All stainless steel construction.
- Small footprint (13 1/2" x 17 2/11") fits into tight counter space.
- 120V/60Hz or 230V/50Hz equipment with high output.
- Insulated and air cooled.
- Self-dispensing bread drawer slides forward for removal of product.
- Super feeder included.
- One sided toasting.
- High temperature bearings.

Reliability backed by APW Wyott's Warranty

- All APW Wyott toasters are backed by a 2-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.
- Certified by the following agencies




See reverse side for product specifications.

PRODUCT:

QUANTITY:

ITEM #:

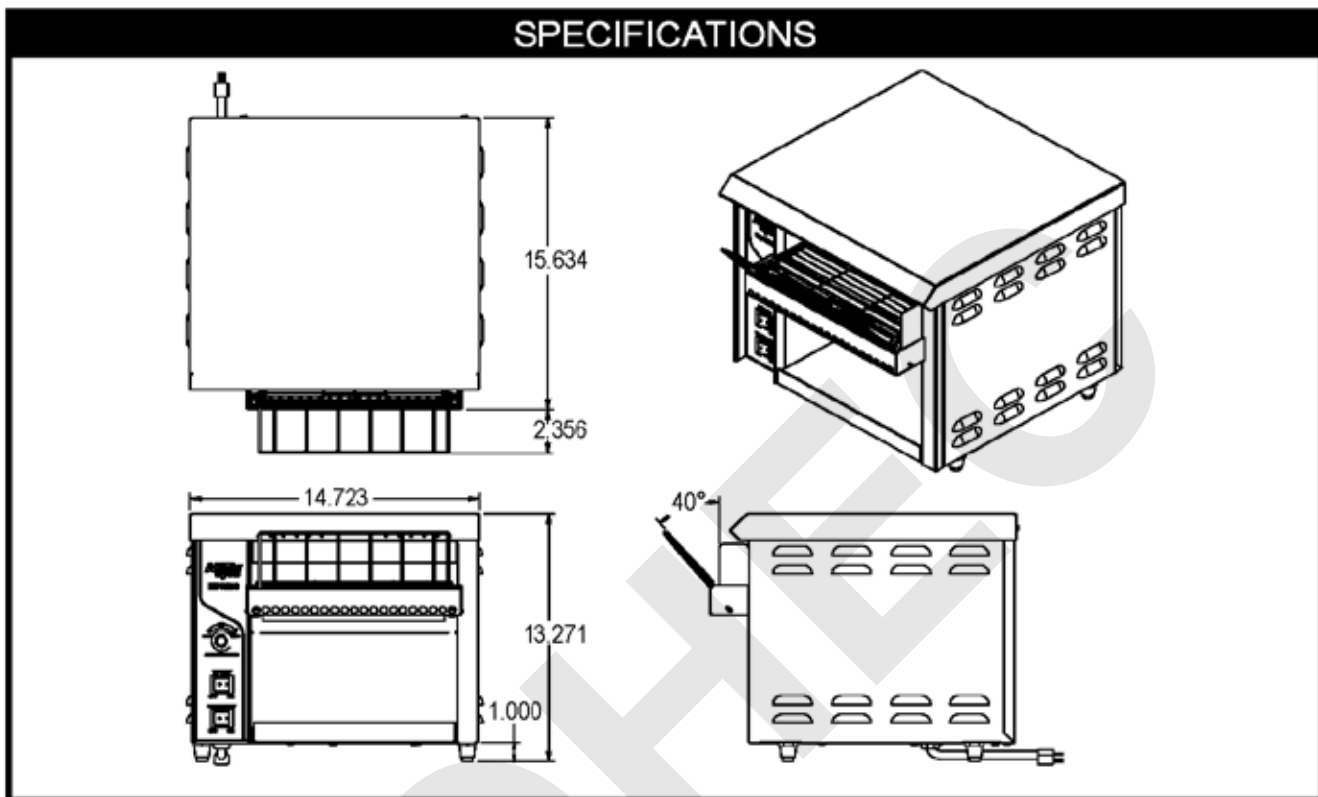

Construction:

Stainless steel housing and radiant reflector. Metal sheathed heating elements. Stainless steel front wire guard. High temperature insulation protects control panel and exteriors.

Electrical Information:

Each unit is equipped with at least a 39", three wire grounded power cord which terminates with a standard three-pronged male plug. The U.S. 120V unit utilizes a NEMA 5-15P plug and the Canadian 120V unit utilizes a 5-20P plug. The 208V, 240V, and 230V all use a NEMA 6-20P.

Electrical Specifications:

AT Express 120V: 120V, 1725W, 14.4 amps AT Express 230V: 230V, 1725W, 7.5 amps

Capacity:

Up to 300 pieces per hour.

Overall Dimensions:

13 1/4"H x 15 3/64"W x 17 3/16"D (16 3/4" w/o plug)(33.66cm x 38.21cm x 43.66cm)

Shipping:

35 lbs (16 kg)
Freight Class 100
FOB: Dallas, TX