

# U.S.S. Universal Shelving Systems

## HEAVY DUTY WIRE SHELVING





- **Standard Design:** The open wire design of these heavy-gauge carbon-steel, stainless steel or gold epoxy-coated steel shelves minimizes dust accumulation and allows a free circulation of air.
- **Fast, Secure Assembly:** Post has numbered rolled, circular grooves along its entire length at 1" (25mm) intervals. A tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools and the numbered grooves take the guesswork out of shelf height positioning.
- **Adjustability:** Shelves can be adjusted at 1" (25 mm) intervals along the entire length of the post.
- **Durable Heavy duty:** Wire shelving is available in three options: Chrome-plated, stainless steel, and gold epoxy-coated. Each shelf can carry up to 250 kg weight load.
- **Adjustable Feet:** Bolt levelers with rubber cap compensate for surface irregularities.
- **Warranties:** Chrome-plated, stainless steel shelves and posts are guaranteed for 1 year against rust formation. Gold epoxy-coated shelves and posts are guaranteed for 15 years against rust formation.

# U.S.S. Universal Shelving Systems

## HEAVY DUTY WIRE SHELVING

WIDTH (In.) (mm)		LENGTH (In.) (mm)		CAT.NO. GOLD EPOXY COATED	CAT.NO. CHROME	CAT.NO. STAINLESS
14	355	24	610	1424 EHD	1424 HD	1424 SHD
14	355	30	760	1430 EHD	1430 HD	1430 SHD
14	355	36	910	1436 EHD	1436 HD	1436 SHD
14	355	42	1060	1442 EHD	1442 HD	1442 SHD
14	355	48	1220	1448 EHD	1448 HD	1448 SHD
14	355	60	1525	1460 EHD	1460 HD	1460 SHD
14	355	72	1825	1472 EHD	1472 HD	1472 SHD
18	455	24	610	1824 EHD	1824 HD	1824 SHD
18	455	30	760	1830 EHD	1830 HD	1830 SHD
18	455	36	910	1836 EHD	1836 HD	1836 SHD
18	455	42	1060	1842 EHD	1842 HD	1842 SHD
18	455	48	1220	1848 EHD	1848 HD	1848 SHD
18	455	54	1370	1854 EHD	1854 HD	1854 SHD
18	455	60	1525	1860 EHD	1860 HD	1860 SHD
18	455	72	1825	1872 EHD	1872 HD	1872 SHD
21	530	24	610	2124 EHD	2124 HD	2124 SHD
21	530	30	760	2130 EHD	2130 HD	2130 SHD
21	530	36	910	2136 EHD	2136 HD	2136 SHD
21	530	42	1060	2142 EHD	2142 HD	2142 SHD
21	530	48	1220	2148 EHD	2148 HD	2148 SHD
21	530	54	1370	2154 EHD	2154 HD	2154 SHD
21	530	60	1525	2160 EHD	2160 HD	2160 SHD
21	530	72	1825	2172 EHD	2172 HD	2172 SHD
24	610	24	610	2424 EHD	2424 HD	2424 SHD
24	610	30	760	2430 EHD	2430 HD	2430 SHD
24	610	36	910	2436 EHD	2436 HD	2436 SHD
24	610	42	1060	2442 EHD	2442 HD	2442 SHD
24	610	48	1220	2448 EHD	2448 HD	2448 SHD
24	610	54	1370	2454 EHD	2454 HD	2454 SHD
24	610	60	1525	2460 EHD	2460 HD	2460 SHD
24	610	72	1825	2472 EHD	2472 HD	2472 SHD

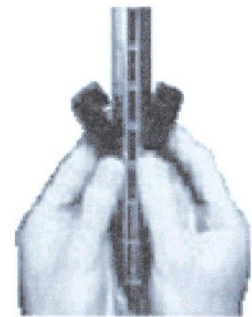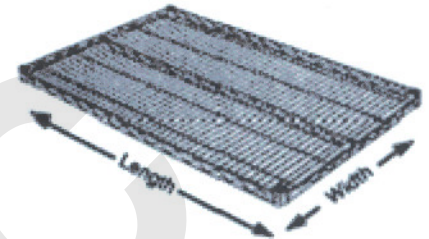


Split Sleeves

## POSTS

Height*		Approx. Pkd. Wt		Cat.No. Gold Epoxy Coated	Cat.No.. Plated	Cat.No. Stainless
(In.)	(mm)	(lbs.)	(kg)			
7 <sup>5</sup> / <sub>8</sub>	190	½	0.2	7EP	7P	
14 ½	368	1	0.5	13EP	13P	13SP
28 ½	724	1¼	0.75	27EP	27P	27SP
34 ½	876	2	0.9	33EP	33P	33SP
54 <sup>9</sup> / <sub>16</sub>	1386	3	1.4	54EP	54P	54SP
62 <sup>9</sup> / <sub>16</sub>	1589	3½	1.6	63EP	63P	63 SP
74 <sup>5</sup> / <sub>8</sub>	1895	4	1.8	74EP	74P	74 SP
86 <sup>5</sup> / <sub>8</sub>	2220	5	2.3	86EP	86P	86 SP

Posts are Grooved and Numbered at 1" (25mm) increment



- Height includes leveling bolt and cap.
- \* Depending on the use.
- **Important:** When ordering remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.
- The manufacturer reserve the right to change models without prior notice.