



Model GD-15

Specification:

Gas designer series fryer, Model GD-15F; 15" (381mm) wide, 24" (610mm) deep x 20" (508mm) high, easy clean design, with stainless steel front, black porcelain lower panel and black coat epoxy sides Steel frypot with open pot design, 15 lbs. shortening capacity and deep cold zone. Exclusive 1° F snap action thermostat. Piezo spark ignition, natural or propane gas, 45,000 total BTU input. Designed as free standing or to be banked with other GD series equipment.

Standard Features:

- Stainless steel front with black porcelain lower panel
- Black powder coat epoxy sides
- 4" (102mm) Sanitary legs
- Easy clean features
- 18" (457mm) deep cooking surface
- Open pot design, no tubes
- Deep cold zone, keeps contaminants out of cooking area, extending shorting life
- Cold rolled steel frypot
- 15 lbs shortening capacity
- 100% safety system
- 1° F snap action thermostat
- Piezo spark ignition
- Rear gas connection w/pressure regulator
- Natural or propane gas
- 45,000 total BTU
- Twin fryer baskets

Optional Features:

- ☐ Stainless steel sides and back

Optional CSD-GF Stand:

- ☐ Floor Stands: Heavy-duty stands of open design with seamless welded square tube leg and black finish storage shelf. Working height of all units on stands 35-1/2" (902mm). Stand widths of 15" (381mm), Each unit must have its own stand.
- ☐ Optional: Stainless steel finish
- ☐ Swivel casters W/front brakes; set of 4



Garland Commercial Industries, Inc.
185 East South Street
Freeland, Pennsylvania 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

Garland Commercial Ranges Ltd
1177 Kamato Road, Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669

Enodis UK LTD
Swallowfield Way, Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041



Item #: _____

Model: GD-15F

Product Name: Gas Designer Series Fryer


MODEL	Over All Dimensions			Total Input BTU/Kw	Shipping Wt Lb/kg
	Width	Height	Depth		
GD-15F	15" (381mm)	20" (508mm)	24" (610mm)	45,000/13.2	120/54

Gas Input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Clearances To Combustible Wall		Floor or Base
Sides	Back	
6" (152mm)	6" (152mm)	Non Combustible

Manifold Inlet Size NPT	Operating Pressure			
	Natural		Propane	
	"WC	mbar	"WC	mbar
1/2"	4.2	10.5	9	22.4

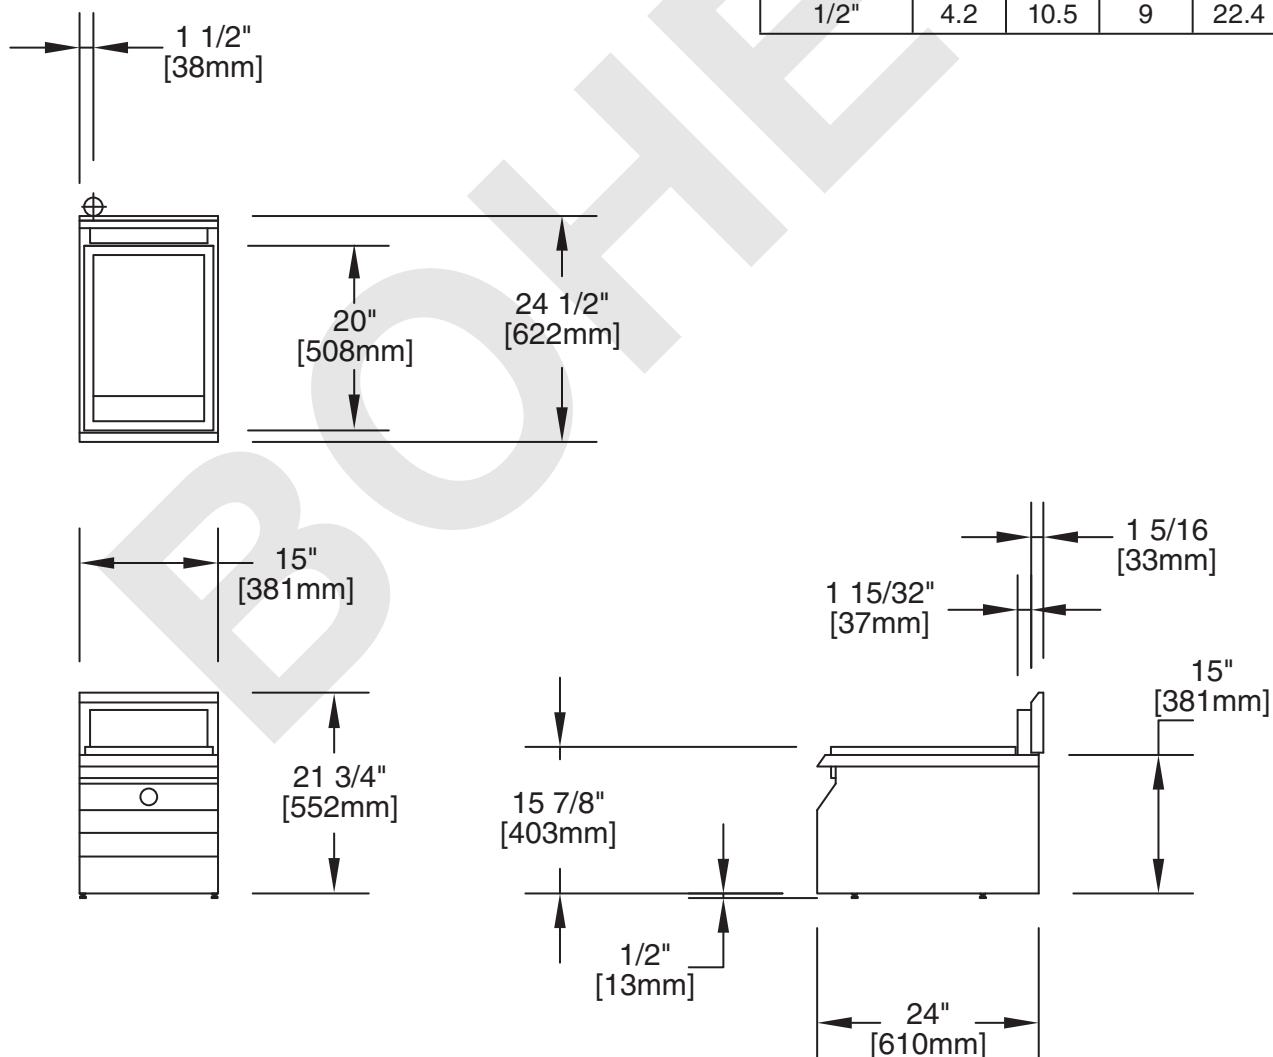

Continuous product improvement is a Garland policy.

Specifications and design are subject to change without notice.

Printed in USA

Form #GD-15 (04/05)