



Item #: _____
Model: GD-15G(GTH), -24G(GTH) & -36G(GTH)
Product Name: Gas Designer Series Griddles



Model GD-24G

Specification:

Gas designer series griddles in three widths: models GD-15G(GTH), 15" (381mm) wide; GD-24G(GTH), 24" (610mm) wide and GD-36G(GTH), 36" (914mm) wide. Designed as free standing or to be banked with other GD series equipment. 24" (610mm) deep x 15" (381mm) high, easy clean design with stainless steel front, black porcelain lower panel and black coat epoxy sides, fully grooved or grooved section griddle available. Griddles valve (G) or thermostat (GTH) controlled, piezo spark ignition, natural or propane gas, input ratings of 20,000, 40,000 and 60,000 BTU.



Standard Features:

- Stainless steel front with black porcelain lower panel
- Black powder coat epoxy sides
- 4" (102mm) Sanitary legs
- Easy clean design
- 18" (457mm) deep cooking surface
- Piezo spark ignition
- Rear gas connection w/pressure regulator
- Natural or propane gas
- 20,000, 40,000 or 60,000 BTU total input

Optional Features:

- ☐ Stainless steel sides and back
- ☐ Hi-Lo Valve control use suffix G (i.e. GD-15G)
- ☐ Thermostat control use suffix GTH (i.e. GD-15GTH)
- ☐ Fully grooved griddle, add suffix U (i.e. GD-15GU) or grooved sections, add U1 for 12" (305mm) on left side and U2 for 24" (610mm) on left side
- ☐ "CE" approved models have Flame Failure protection. When ordering this option please add the suffix "FF" to the model number i.e. GD-15GFF, please note Flame Failure protection is not available on thermostat controlled (GTH) models.

Optional CSD Series Stands:

- ☐ Floor Stands: Heavy-duty stands of open design with seamless welded square tube leg and black finish storage shelf. Working height of all units on stands 35-1/2" (902mm). Stand widths available in 15" (381mm), 24" (610mm) and 36" (914mm). Each unit must have its own stand. Example for GD-36G griddle, specify compatible CSD-36 stand.
 - ☐ Optional: Stainless steel finish
 - ☐ Swivel casters W/front brakes; set of 4



Garland Commercial Industries, Inc.
185 East South Street
Freeland, Pennsylvania 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

Garland Commercial Ranges Ltd
1177 Kamato Road, Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669

Enodis UK LTD
Swallowfield Way, Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041



Item #: _____
 Model: GD-15G(GTH), -24G(GTH) & -36G(GTH)
 Product Name: Gas Designer Series Griddles


MODEL	Over All Dimensions			Total Input BTU/Kw	Shipping Wt Lb/kg
	Width	Height	Depth		
GD-15G, GD-15GTH	15" (381mm)	15" (381mm)	24" (610mm)	20,000/5.86	85/39
GD-24G, GD-24GTH	24" (610mm)	15" (381mm)	24" (610mm)	40,000/11.72	146/66
GD-36G, GD-36GTH	36" (914mm)	15" (381mm)	24" (610mm)	60,000/17.58	200/91

Gas Input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Clearances To Combustible Wall		Floor or Base
Sides	Back	
6" (152mm)	6" (152mm)	Combustible

Manifold Inlet Size NPT	Operating Pressure			
	Natural		Propane	
	"WC	mbar	"WC	mbar
3/4"	4.0	10	10	24.9

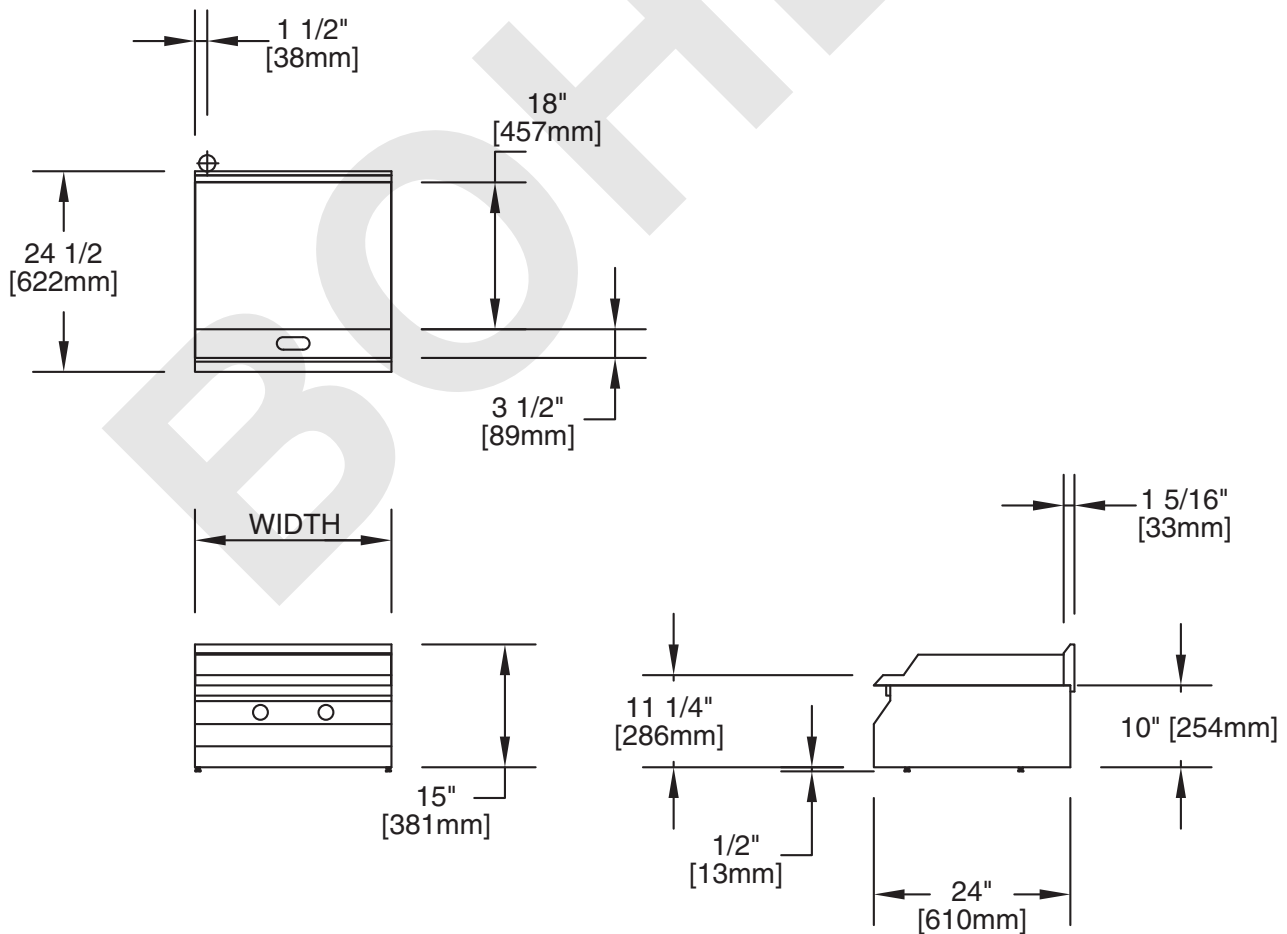

Continuous product improvement is a Garland policy. Specifications and design are subject to change without notice.

Printed in USA

Form # GD-15G, -24G, & -36G (01/05)