

- ✓ Produces up to 507 lbs. (230 Kgs.)* of ICE per day
- ✓ Constructed from sturdy, corrosion-resistant stainless steel
- ✓ Ultra-low profile - 23" (584 mm) high
- ✓ Only 22" (558 mm) wide
- ✓ Available with an air- or water-cooled condenser



ICE 0520 on a B42 Bin

ICE-O-Matic is the Best ICE Making Solution for: Hard Water, Food Safety and Tight Spaces

Problem

Food Safety

Food safety concerns about slime- and odor-causing bacteria

Hard Water

Scaling due to hard water slows Ice production

Tight-Fitting Spaces

Kitchen space utilization

Dirty Air Filter

Forget to change the air filter?

Solution

PURE ICE® - Exclusively by ICE-O-Matic

Built-in antimicrobial protection for the life of the machine reduces bacteria and slime fungus growth. ICE-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.

Harvest Assist

Consistent ICE production 24 / 7 for the life of the ICE Maker, while reducing operating costs


22 in (558 mm) Wide / 23 in. (584 mm) Tall

Maximum ICE production in a minimum amount of space with an ultra-low profile

Filter-Free Air

No air filter to change


ICE 0520 Series Cube ICE Maker

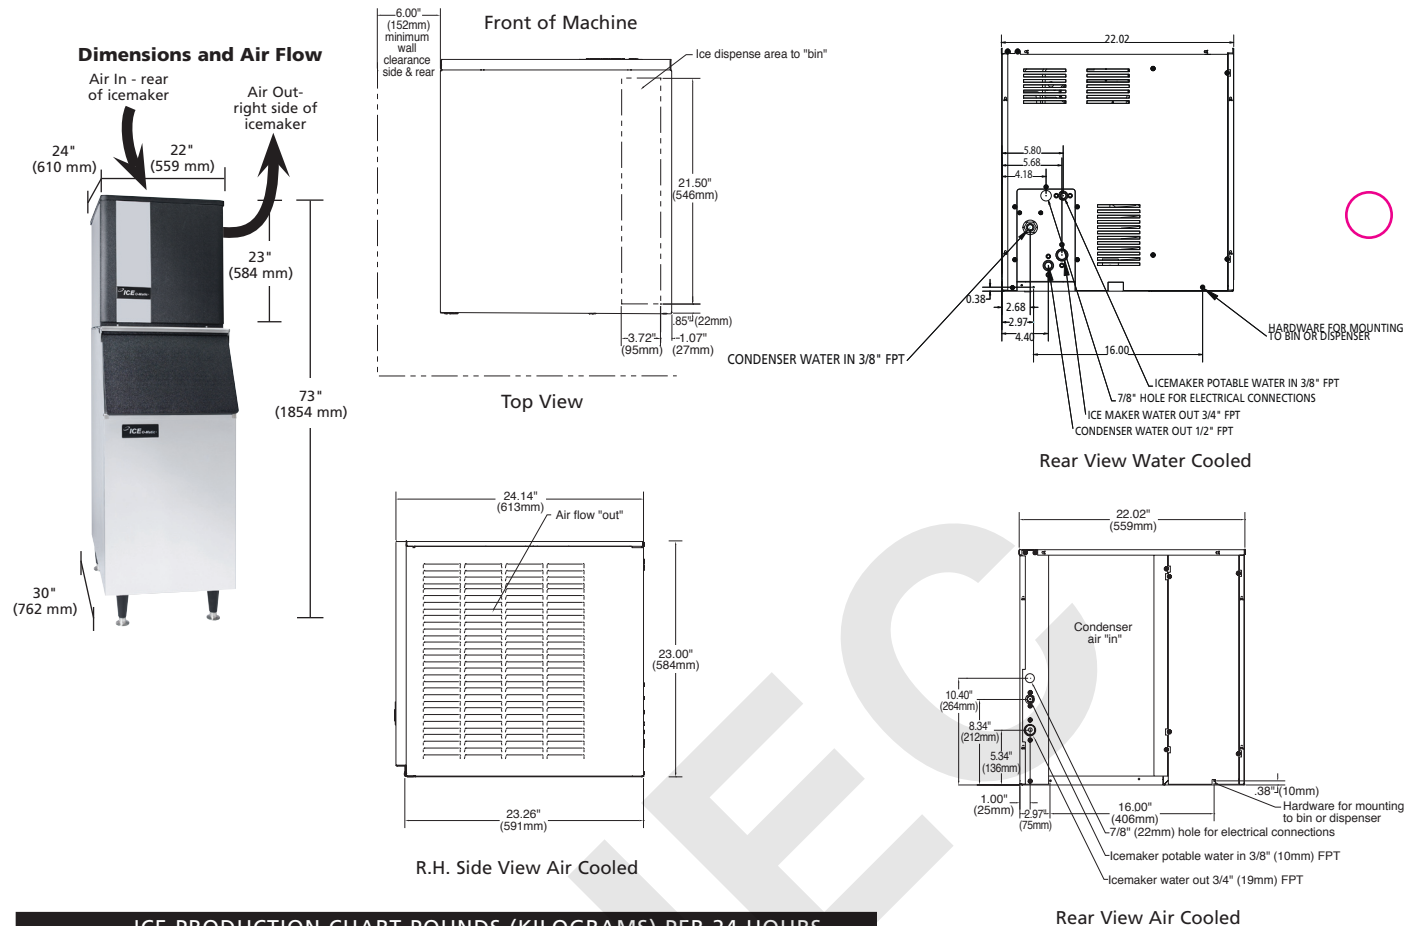

ICE PRODUCTION CHART POUNDS (KILOGRAMS) PER 24 HOURS

ICE 0520					ICE 0525			
Conds. Unit	Air Temp. °F (°C)	Water Temp. °F (°C)			Air Temp. °F (°C)	Water Temp. °F (°C)		
		80°(27°)	70°(21°)	50°(10°)		80°(27°)	70°(21°)	50°(10°)
Air Cooled	90° (32°)	355 (161)	382 (174)	414 (188)	90° (32°)	319 (145)	343 (156)	397 (180)
	80° (27°)	370 (168)	398 (181)	437 (199)	80° (27°)	370 (168)	398 (181)	438 (199)
	70° (21°)	390 (177)	419 (190)	461 (210)	70° (21°)	404 (184)	435 (198)	478 (217)
Water Cooled	90° (32°)	401 (182)	431 (196)	461 (210)				
	80° (27°)	409 (186)	440 (200)	484 (220)				
	70° (21°)	429 (195)	461 (209)	507 (230)				

- 90° / 70° figures are rated in accordance with ARI Standard 810. All remaining points are mathematical estimates.
- All specifications and performance data are subject to normal manufacturing variances.



OPERATING LIMITS

Ambient Temp. Range	50° - 110°F (10° - 43°C)
Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker	Min. 20 psi (1.4 bar)
Water in	Max. 60 psi (6.9 bar)

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. Unit	ICE Production per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	ICE Production per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of ICE 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ICE 90° Air / 70° Water	Heat of Registration Btuh	Voltage Characteristics	No. of Wires	Min. Circuit Amp.	Max. Fuse Size	Shipping Weight lbs. (Kgs.)
				ICE Prod. Use	Cond. Use							
ICE0520•A	Air	461 (210)	382 (174)	25.8 (98)	n/a	6.8	8627	115/60/1	3	15.4	20	165 (75)
ICE0520•W	Water	507 (230)	431 (196)	21.8 (83)	157 (594)	5.1	8342	115/60/1	3	13.5	15	175 (80)
ICE0525•A	Air	478 (217)	343 (156)	29.3 (111)	n/a	7.3	8061	220-240/50/1	3	7.8	15	165 (75)

See Bin specification sheet for information on ICE Storage bins

- Represents cube size - for full cube substitute an "F" for half cube substitute an "H". Dispenser-mounted units require bin thermostat kit #1051020-02. Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



We reserve the right to make changes in design and construction at any time without obligation.
2006 ©ICE-O-Matic Spec Sheet No: 1007 Rev: B-06/06-SS

ICE o-Matic®

ICE-O-Matic 11100 E. 45th Avenue, Denver, CO 80239
Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com